


迴轉接頭

特點

- ◇ 流體氣壓蒸氣,輸入滾輪軸介面接頭.
- ◇ 可以做高速迴轉運動不易漏氣.
- ◇ 蒸氣有雙迴路可供回流作用.



尺寸圖

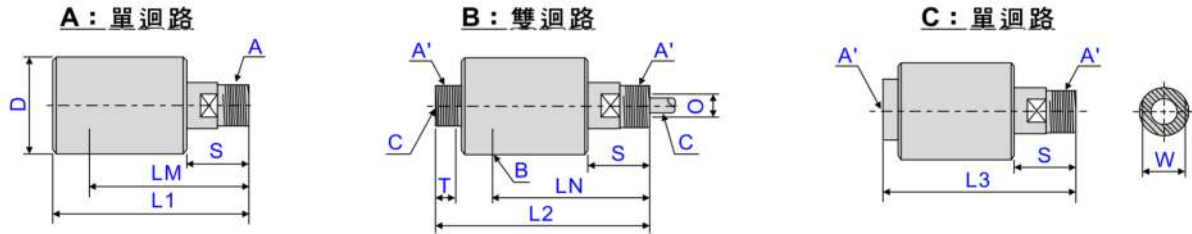

型 式	編號	牙 徑				φ D	L1	L2	L3	LM	LN	φ O	S	T	W	φ W'
		A	B	C	A'											
TW-190	8A	1/4	—	—	1/4	40	84	—	93	71	—	6	29	—	15	—
TW-200	10A	3/8	—	—	3/8	40	84	—	93	71	—	9	29	—	15	—
TW-210(TW-210Q)	15A	1/2	1/2	1/8	1/2	55	114	130	120	98	98	14	38	9	22	—
TW-220(TW-220Q)	20A	3/4	3/4	1/4	3/4	61	126	147	132	106	106	17	42	10	24	—
TW-330(TW-330Q)	25A	1	1	3/8	1	73	138	160	145	116	116	22	45	11	30	—
TW-340(TW-340Q)	32A	1 1/4	1	1/2	1 1/4	95	170	186	176	140	137	29	50	13	41	—
TW-350(TW-350Q)	40A	1 1/2	1	3/4	1 1/2	100	185	203	192	151	148	34	54	13	46	—
TW-355(TW-355Q)	50A	2	1 1/2	1	2	115	230	241	237	177	173	48	60	17	60	—
TW-360(TW-360Q)	60A	2 1/2	2	1 1/4	2 1/2	143	267	269	275	216	210	60	62	18	—	10
TW-370(TW-370Q)	80A	3	2 1/2	1 1/2	3	168	303	315	310	245	235	72	65	21	—	10

高速迴轉接頭

直接頭			彎頭接頭		
管徑D	訂購編號	牙徑R	管徑D	訂購編號	牙徑R
φ 4	RHC4-M5	M5x0.8	φ 4	RHL4-M5	M5x0.8
	RHC4-M6	M6x1		RHL4-M6	M6x1
	RHC4-01	G1/8		RHL4-01	G1/8
φ 6	RHC6-01	G1/8	φ 6	RHL6-01	G1/8
	RHC6-02	G1/4		RHL6-02	G1/4
φ 8	RHC8-01	G1/8	φ 8	RHL8-01	G1/8
	RHC8-02	G1/4		RHL8-02	G1/4
φ 10	RHC10-03	G3/8	φ 10	RHL10-03	G3/8
	RHC10-04	G1/2		RHL10-04	G1/2
φ 12	RHC12-03	G3/8	φ 12	RHL12-03	G3/8
	RHC12-04	G1/2		RHL12-04	G1/2
φ 6.65	RHC1/4-01	G1/8	φ 6.65	RHL1/4-01	G1/8
	RHC1/4-02	G1/4		RHL1/4-02	G1/4
φ 7.94	RHC5/16-01	G1/8	φ 7.94	RHL5/16-01	G1/8
	RHC5/16-02	G1/4		RHL5/16-02	G1/4
φ 9.53	RHC3/8-03	G3/8	φ 9.53	RHL3/8-03	G3/8
	RHC3/8-04	G1/2		RHL3/8-04	G1/2

容許迴轉數：

配管徑	φ 4	φ 6, φ 1/4	φ 8, φ 5/16	φ 10, φ 3/8	φ 12
轉速r.p.m	1500	1200	1200	1000	1000

低速回轉接頭

直接頭			彎頭接頭		
管徑D	訂購編號	牙徑R	管徑D	訂購編號	牙徑R
φ 4	RC4-M5	M5x0.8	φ 4	RL4-M5	M5x0.8
	RC4-M6	M6x1		RL4-M6	M6x1
	RC4-01	G1/8		RL4-01	G1/8
φ 6	RC6-M6	M6x1	φ 6	RL6-M6	M6x1
	RC6-01	G1/8		RL6-01	G1/8
φ 8	RC8-02	G1/4	φ 8	RL8-02	G1/4
	RC8-03	G3/8		RL8-03	G3/8
φ 10	RC10-01	G1/8	φ 10	RL10-01	G1/8
	RC10-02	G1/4		RL10-02	G1/4
	RC10-03	G3/8		RL10-03	G3/8
	RC10-04	G1/2		RL10-04	G1/2
φ 12	RC12-02	G1/4	φ 12	RL12-02	G1/4
	RC12-03	G3/8		RL12-03	G3/8
	RC12-04	G1/2		RL12-04	G1/2
	RC1/4-01	G1/8		RL1/4-01	G1/8
φ 6.65	RC1/4-02	G1/4	φ 6.65	RL1/4-02	G1/4
	RC1/4-03	G3/8		RL1/4-03	G3/8
	RC5/16-01	G1/8		RL5/16-01	G1/8
φ 7.94	RC5/16-02	G1/4	φ 7.94	RL5/16-02	G1/4
	RC5/16-03	G3/8		RL5/16-03	G3/8
	RC3/8-03	G3/8		RL3/8-03	G3/8
φ 9.53	RC3/8-04	G1/2	φ 9.53	RL3/8-04	G1/2

容許迴轉數：

配管徑	φ 4	φ 6, φ 1/4	φ 8, φ 5/16	φ 10, φ 3/8	φ 12
轉速r.p.m	500	500	400	300	250